

WP-280

WATER-COOLED

Hand-Held Torches

2/2012 WC0187




- 280 amp DC, 195 amp AC at 100% duty cycle*
- Electrode range: 0.020"–1/8" (0.5–3.2 mm)

*Conforms to IEC Standard 60974-7. Max rating based on 77° F (25° C) environment at maximum handle temperature rise of 86° F (30° C) or power cable temperature rise of 104° F (40° C). 100% Argon gas, 1/8-inch (3.2 mm) 2% Ceriated electrode and Miller® Coolmate™ 4.

WP-280



4.1 oz
(117 g)

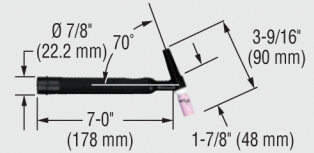

A reliable water-cooled solution for demanding applications!

"WP" Series TIG torches

These innovative torches feature a resilient, high-temperature silicone rubber insulation that prevents leakage of high-frequency voltage, a common occurrence of phenolic insulation. They have earned the respect of the most demanding industries around the world in meeting their welding torch needs day in and day out.


Two-piece torch head and exclusive **Super Cool™ Technology** provides additional surface area to increase cooling efficiency and capacity.

Minimize downtime due to overheating and extend torch life through consistent and dependable water-cooled performance.

Mechanical fittings provide a secure gas and water connection to prevent leakage and allow easy hose replacement.



Secure hook-and-loop attachment of the cable cover prevents slippage and provides cable protection, while also allowing access for remote finger control cables.

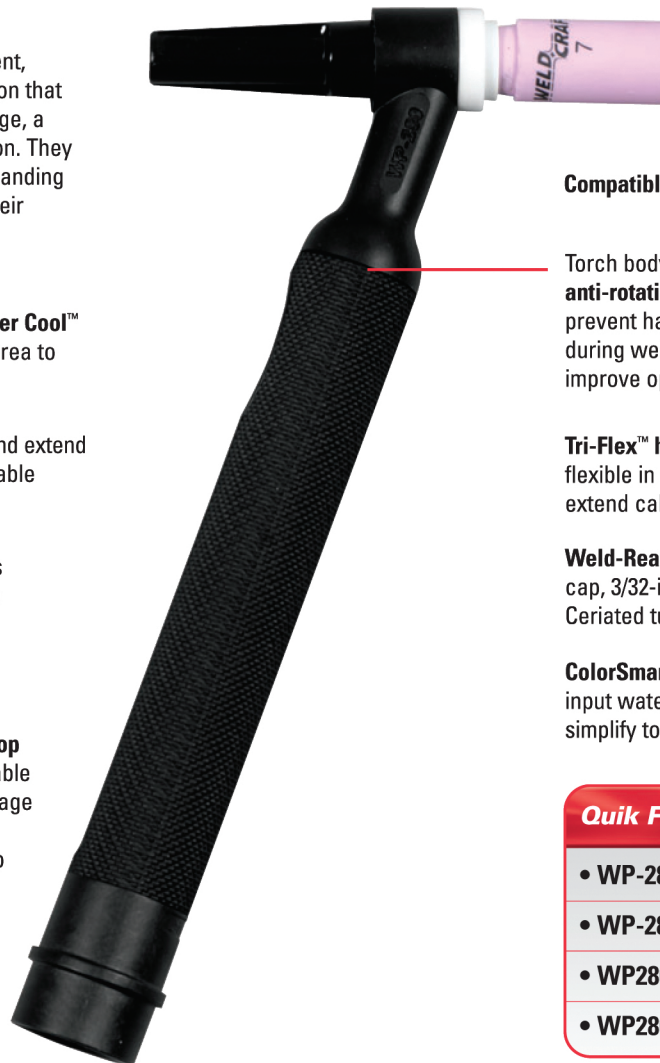

Compatible with all 13N Series consumables.

Torch body includes an **anti-rotation feature** to prevent handle movement during welding and improve operator control.



Tri-Flex™ hose and cable assembly remains flexible in cold weather to improve handling and extend cable life.

Weld-Ready™ packages include medium back cap, 3/32-inch collet and collet body, and 3-inch Ceriated tungsten electrode.

ColorSmart™ hose and cable sets differentiate input water, water/power cable and gas hoses to simplify torch package installation.

Quik Find Guide Torch Packages

• WP-280-12-RM	12.5' (3.8 m)
• WP-280-25-RM	25' (7.6 m)
• WP28012RMD50**	12.5' (3.8 m)
• WP28025RMD50**	25' (7.6 m)

Torch packages include cable cover to reduce cable clutter and offer additional cable protection.

**Includes Miller® #195 377 Dinse connector for direct connection to Dynasty® and Maxstar® 200, 280 and 350 TIG Welders.

WELDCRAFT

2741 N. Roemer Road
Appleton, WI 54911 USA

Weldcraft.com

Phone: 1.920.882.6800

Toll-free: 1.800.752.7620 (USA only)

Fax: 1.920.882.6840

E-mail: customerservice@weldcraft.com

WELD The TIG Welder's Choice
CRAFT